

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 October 2005 (27.10.2005)

PCT

(10) International Publication Number  
**WO 2005/100455 A1**

(51) International Patent Classification<sup>7</sup>: **C08J 3/12**,  
F26B 17/00

(21) International Application Number:  
PCT/JP2005/004161

(22) International Filing Date: 3 March 2005 (03.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004-116665 12 April 2004 (12.04.2004) JP  
2004-356690 9 December 2004 (09.12.2004) JP

(71) Applicant (for all designated States except US): **THE YOKOHAMA RUBBER CO., LTD.** [JP/JP]; 36-11, Shimbashi 5-chome, Minato-ku, Tokyo 105-8685 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KANENARI,**


Daisuke [JP/JP]; c/o The Yokohama Rubber Co., Ltd., Hiratsuka Factory, 2-1, Oiwake, Hiratsuka-shi, Kanagawa 254-8601 (JP). **KIRINO, Yoshiaki** [JP/JP]; c/o The Yokohama Rubber Co., Ltd., Hiratsuka Factory, 2-1, Oiwake, Hiratsuka-shi, Kanagawa 254-8601 (JP).

(74) Agents: **AOKI, Atsushi** et al.; A. Aoki, Ishida & Associates, Toranomom 37 Mori Bldg., 5-1, Toranomom 3-chome, Minato-ku, Tokyo 105-8423 (JP).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: METHOD FOR PRODUCING COMPOSITION CONTAINING POLYMER FROM LIQUID CONTAINING POLYMER COMPONENT AND DRYING APPARATUS FOR SAME

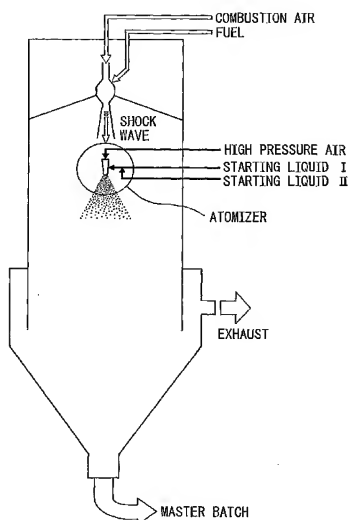

(57) Abstract: By spraying and drying a liquid containing a polymer component (e.g., natural rubber, synthetic rubber, etc.) and a liquid containing a filler (e.g., carbon black, silica, etc.) under an atmosphere of a shock wave generated from pulse combustion, a polymer containing a filler is produced at an improved work efficiency and heat efficiency, without causing degradation of the quality, etc. of the product.



WO 2005/100455 A1



**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*